



LEISTUNGSERKLÄRUNG



Nr. 0100 – DE

- 1. Eindeutiger Kenncode des Produkttyps: **Injektionssystem fischer Powerbond**
- 2. Verwendungszweck(e):

Produkt	Verwendungszweck (e)
Verbundanker zur Verwendung in Beton	Zur Verankerung und/oder Unterstützung tragender Betonelemente oder schwerer Bauteile wie Bekleidungen und Unterdecken, siehe Anhang, insbesondere Anhänge B 1 bis B 5

3. Hersteller: **fischerwerke GmbH & Co. KG, Otto-Hahn-Straße 15, 79211 Denzlingen, Deutschland**

4. Bevollmächtigter: --

5. System(e) zur Bewertung und Überprüfung der Leistungsbeständigkeit: **1**

6a. Harmonisierte Norm: ---

Notifizierte Stelle(n): ---

6b. Europäisches Bewertungsdokument: **ETAG 001; 2013-04**

Europäische Technische Bewertung: **ETA-12/0160; 2016-04-21**

Technische Bewertungsstelle: **DIBt**

Notifizierte Stelle(n): **1343 – MPA Darmstadt**

7. Erklärte Leistung(en):

**Mechanische Festigkeit und Standsicherheit (BWR 1)**

Wesentliches Merkmal	Leistung
Charakteristische Werte unter statischen und quasi-statischen Einwirkungen für Bemessung nach TR 029 oder CEN/TS 1992-4:2009, Verschiebungen	Siehe Anhang, insbesondere Anhänge C 1 bis C 3

**Brandschutz (BWR 2)**

Wesentliches Merkmal	Leistung
Brandverhalten	Der Dübel erfüllt die Anforderungen der Klasse A 1
Feuerwiderstand	KLF

8. Angemessene Technische Dokumentation und/oder Spezifische Technische Dokumentation: ---

Die Leistung des vorstehenden Produkts entspricht der erklärten Leistung/den erklärten Leistungen. Für die Erstellung der Leistungserklärung im Einklang mit der Verordnung (EU) Nr. 305/2011 ist allein der obengenannte Hersteller verantwortlich.

Unterzeichnet für den Hersteller und im Namen des Herstellers von:

Andreas Bucher, Dipl.-Ing.

Wolfgang Hengesbach, Dipl.-Ing., Dipl.-Wirtsch.-Ing.

Tumlingen, 2016-04-28

- Diese Leistungserklärung wurde in verschiedenen Sprachversionen erstellt. Für den Fall unterschiedlicher Auslegung hat immer die englische Version Vorrang.

- Der Anhang enthält freiwillige und ergänzende Informationen in englischer Sprache. Diese gehen über die (sprachneutral angegebenen) gesetzlichen Anforderungen hinaus.

**Specific Part**

**1 Technical description of the product**

The injection system fischer Powerbond is a bonded anchor consisting of a cartridge with injection mortar fischer FIS PM or FIS HB, an anchor rod and the corresponding fischer Power Sleeve FIS PS.

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between metal part, injection mortar and concrete.

The product description is given in Annex A.

**2 Specification of the intended use in accordance with the applicable European Assessment Document**

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

**3 Performance of the product and references to the methods used for its assessment**

**3.1 Mechanical resistance and stability (BWR 1)**

Essential characteristic	Performance
Characteristic values under static and quasi-static action for design according to TR 029 or CEN/TS 1992-4:2009, Displacements	See Annex C 1 to C 3

**3.2 Safety in case of fire (BWR 2)**

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	No performance assessed

**3.3 Hygiene, health and the environment (BWR 3)**

Regarding dangerous substances there may be requirements (e.g. transposed European legislation and national laws, regulations and administrative provisions) applicable to the products falling within the scope of this European Technical Assessment. In order to meet the provisions of Regulation (EU) No 305/2011, these requirements need also to be complied with, when and where they apply.

**3.4 Safety in use (BWR 4)**


The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

**4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base**


In accordance with guideline for European technical approval ETAG 001, April 2013 used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1


**Installation conditions**

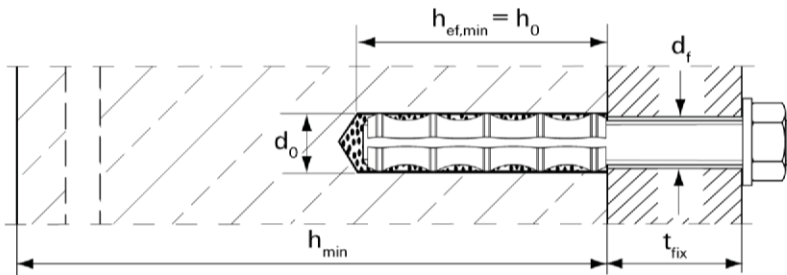

$h_{ef,min} = \text{sleeve length } L_H$   
(see Table B2)

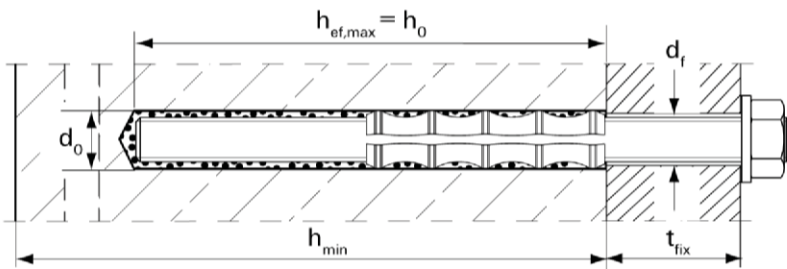

$h_{ef,max} = 2 \cdot \text{sleeve length } L_H$   
(see Table B2)

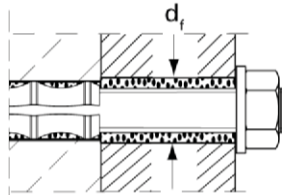


Push-through anchorage  
(annular gap filled with mortar)

**Injection system fischer Powerbond**

**Product description**  
Installation conditions

**Annex A 1**

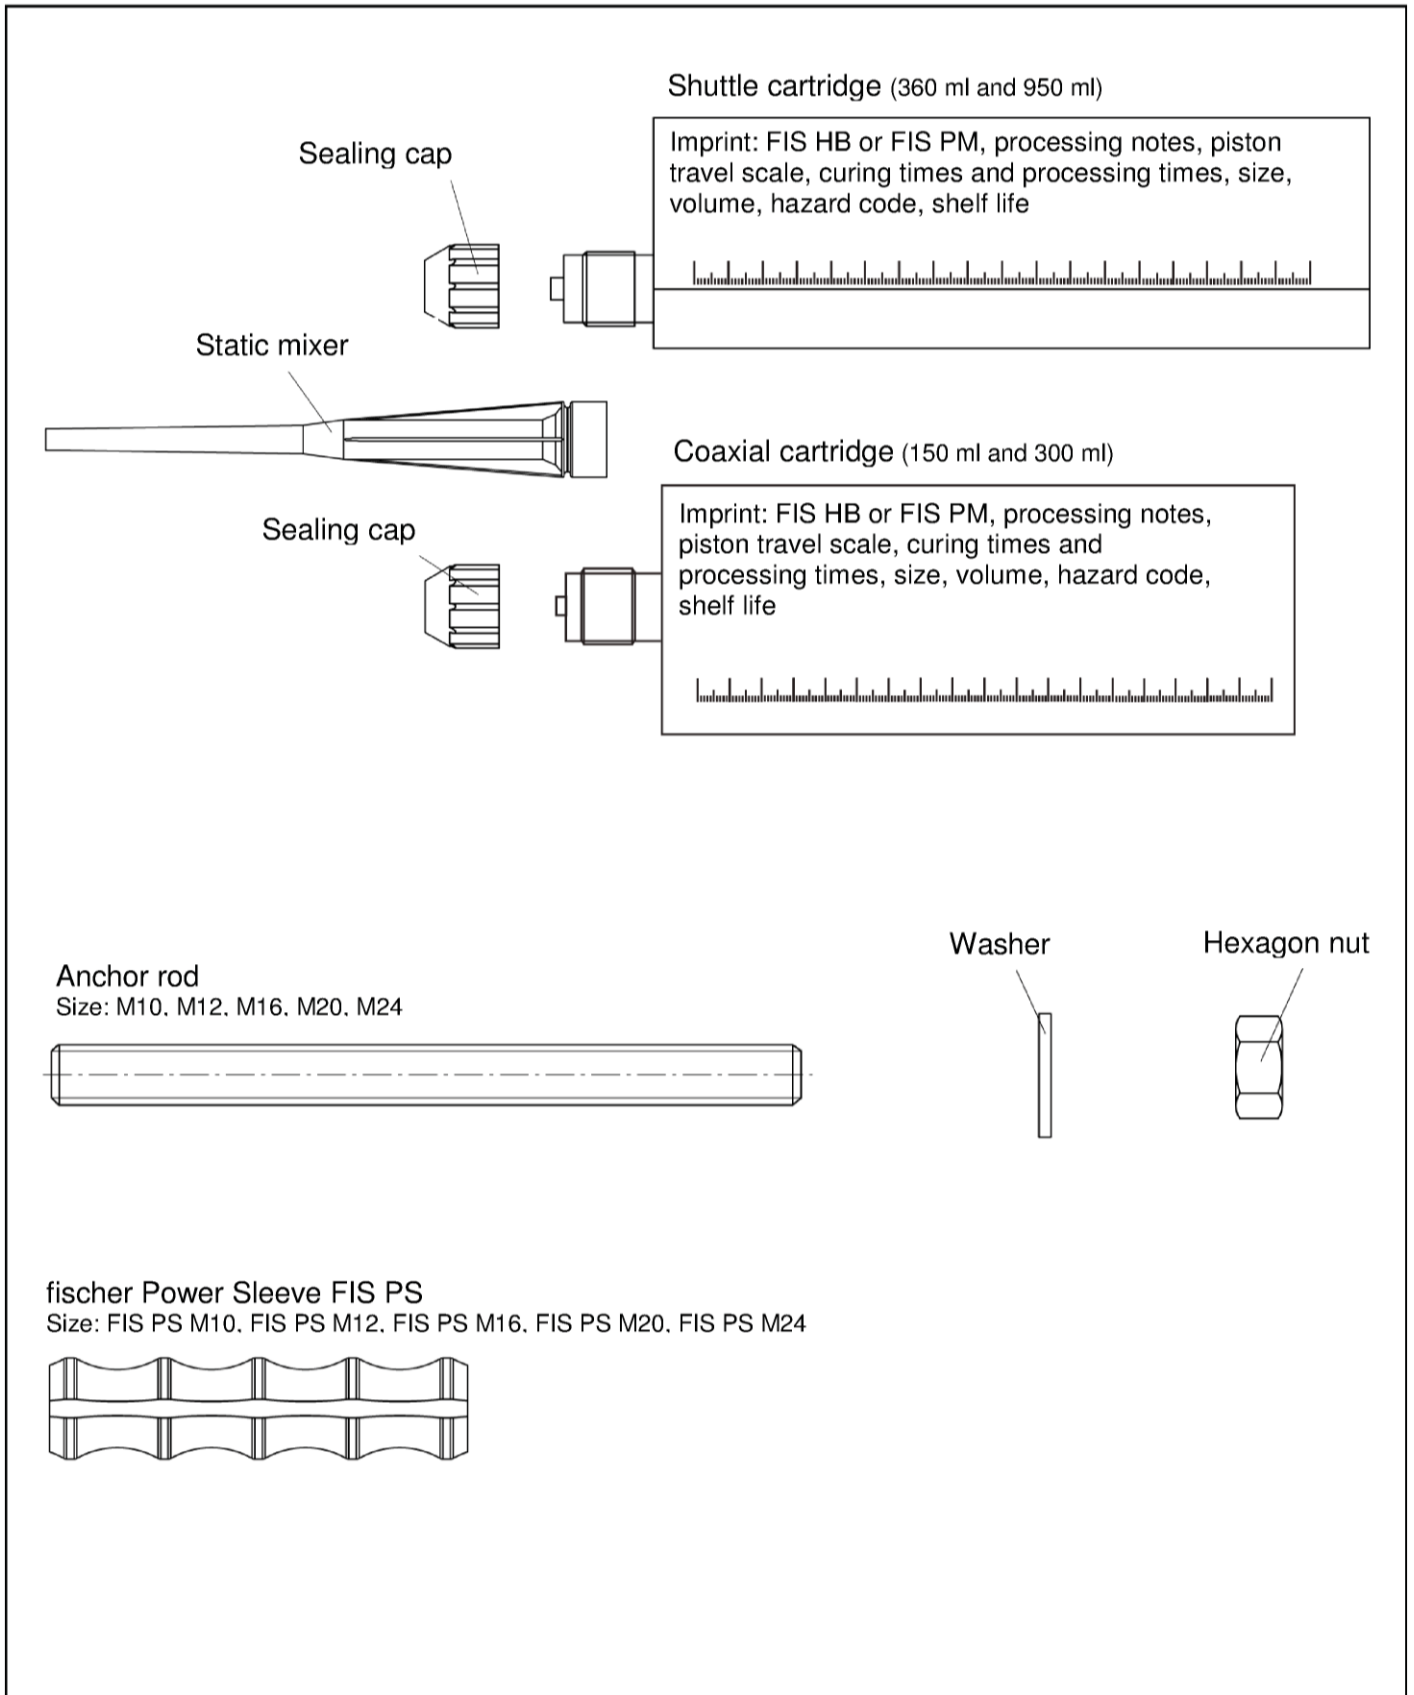

<p><b>Injection system fischer Powerbond</b></p>	<p><b>Annex A 2</b></p>
<p><b>Product description</b> Cartridge, static mixer, steel parts</p>	



**Table A1: Materials**

<b>Part</b>	<b>Description</b>	<b>Material</b>		
1	Mortar cartridge	Mortar, hardener, fillers		
		Steel, zinc plated	Stainless steel A4	High corrosion-resistant steel C
2	Anchor rod	Property class 5.8 or 8.8; EN ISO 898-1: 2013 zinc plated $\geq 5\mu\text{m}$ , EN ISO 4042:1999 A2K or hot-dip galvanised EN ISO 10684:2004 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ fracture elongation	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4062, 1.4662; 1.4462 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ fracture elongation	Property class 50 or 80 EN ISO 3506:2009 or property class 70 with $f_{yk} = 560 \text{ N/mm}^2$ 1.4565; 1.4529 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ fracture elongation
3	Washer ISO 7089:2000	zinc plated $\geq 5\mu\text{m}$ , EN ISO 4042:1999 A2K or hot-dip galvanised EN ISO 10684:2004	1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4666 EN 10088-1:2014	1.4565; 1.4529 EN 10088-1:2014
4	Hexagon nut	Property class 5 or 8; EN ISO 898-2:2013 zinc plated $\geq 5\mu\text{m}$ , ISO 4042:1999 A2K or hot-dip galvanised EN ISO 10684:2004	Property class 50, 70 or 80 EN ISO 3506:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4666 EN 10088-1:2014	Property class 50, 70 or 80 EN ISO 3506:2009 1.4565; 1.4529 EN 10088-1:2014
5	Power Sleeve	Stainless steel A2 or A4		1.4565; 1.4529

**Injection system fischer Powerbond****Product description**  
Materials**Annex A 3**

**Specifications of intended use:**

**Table B1: Overview use categories and performance categories**

Anchorages subject to		FIS HB or FIS PM with ...	
		Anchor rod	with Power Sleeve
			
Hammer drilling		all sizes	
Diamond drilling		Size M10, M12, M16	
Static and quasi static load, in	uncracked concrete	all sizes	Tables B2, C1; C2; C3; C4
	cracked concrete	all sizes	
Use category	Dry or wet concrete	all sizes	
	Flooded hole	all sizes	
Installation temperature		-5°C bis +40°C	
Service temperature	-40°C to +80°C	(max. long term temperature +50°C and max. short term temperature +80°C)	

**Base materials:**

- Reinforced or unreinforced normal weight concrete according to EN 206:2013
- Strength classes C20/25 to C50/60 according to EN 206:2013

**Use conditions (Environmental conditions):**

- Structures subject to dry internal conditions (zinc coated steel, stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure and to permanently damp internal condition, if other particular aggressive conditions exist (high corrosion resistant steel)

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used)

**Design:**

- Anchorages have to be designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.)
- Anchorages under static or quasi-static actions are designed in accordance with EOTA Technical Report TR 029 "Design of bonded anchors" Edition September 2010 or CEN/TS 1992-4:2009

**Installation:**

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- In case of aborted hole: The hole shall be filled with mortar
- Marking and keeping the effective anchorage depth
- Overhead installation is allowed

<b>Injection system fischer Powerbond</b>	<b>Annex B 1</b>
<b>Intended Use Specifications</b>	


**Table B2: Installation parameters**

Size (anchor rod)			M10	M12	M16	M20	M24	
Width across flat	SW	[mm]	17	19	24	30	36	
Nominal drill bit diameter	d <sub>0</sub>	[mm]	14	16	20	25	28	
Depth of drill hole	h <sub>0</sub>	[mm]	h <sub>0</sub> = h <sub>ef</sub>					
Corresponding Power Sleeve	FIS	[-]	PS M10	PS M12	PS M16	PS M20	PS M24	
Length of sleeve	L <sub>H</sub>	[mm]	60	72	96	120	144	
Diameter of sleeve	d <sub>H</sub>	[mm]	14	16	20	25	28	
Effective anchorage depth <sup>1)</sup>	h <sub>ef,min</sub>	[mm]	60	72	96	120	144	
6 • d to 12 • d	h <sub>ef,max</sub>	[mm]	120	144	192	240	288	
<b>Minimum edge distance and minimum spacing for h<sub>ef,min</sub> ≤ h<sub>ef</sub> ≤ h<sub>ef,max</sub></b>								
Cracked concrete	s <sub>min</sub> = c <sub>min</sub>	[mm]	50	55	60	80	100	
Uncracked concrete	s <sub>min</sub> = c <sub>min</sub>	[mm]	55	55	65	80	100	
Diameter of clearance hole in the fixture <sup>2)</sup>	Pre positioned anchorage	d <sub>f</sub>	[mm]	12	14	18	22	26
	Push through anchorage	d <sub>f</sub>	[mm]	15	17	21	26	30
Minimum thickness of concrete member	h <sub>min</sub>	[mm]	h <sub>ef</sub> + 30 (≥ 100)	h <sub>ef</sub> + 2d <sub>0</sub>				
Max. torque moment	T <sub>inst,max</sub>	[Nm]	20	40	60	100	120	

<sup>1)</sup> h<sub>ef,min</sub> ≤ h<sub>ef</sub> ≤ h<sub>ef,max</sub> is possible

<sup>2)</sup> For larger clearance holes in the fixture see TR 029, 4.2.2.1 or CEN/TS 1992-4-1:2009, 5.2.3.1

**fischer anchor rods**

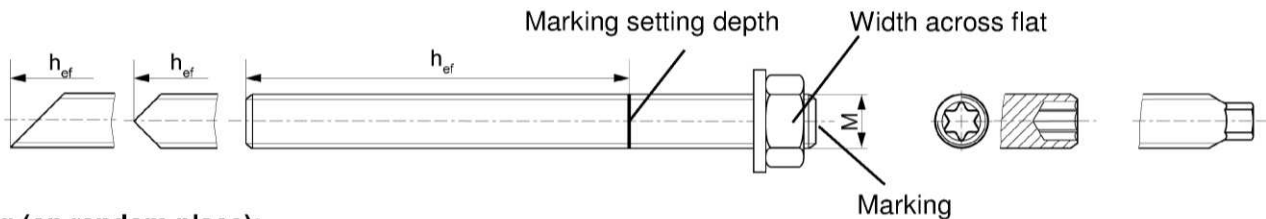


**Marking (on random place):**

Property class 8.8, stainless steel, property class 80 or high corrosion-resistant steel, property class 80: •  
 Stainless steel A4, property class 50 and high corrosion-resistant steel, property class 50: ••

**Commercial standard threaded rods, washers and hexagon nuts may also be used if the following requirements are fulfilled:**

- Materials, dimensions and mechanical properties according Annex A 3, Table A1
- Inspection certificate 3.1 according to EN 10204:2004, the documents have to be stored
- Marking of embedment depth

**fischer Power Sleeve**

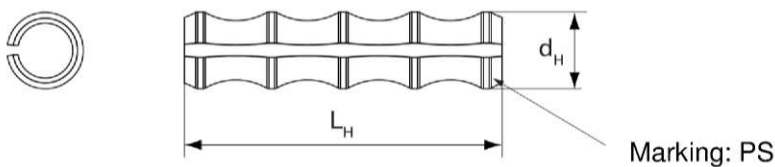

**Injection system fischer Powerbond**


**Intended Use**  
 Installation parameters

**Annex B 2**



**TableB3: Parameters of steel brush FIS BS Ø**

Drill bit diameters	[mm]	14	16	20	25	28
Steel brush diameters $d_b$	[mm]	16	20	25	27	30

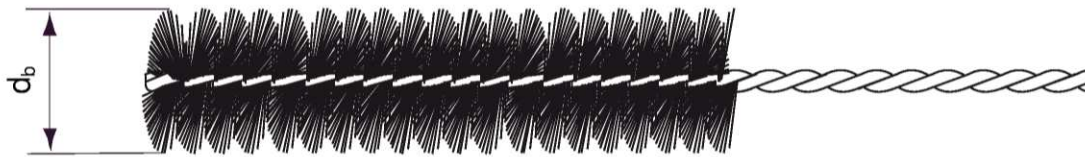

**Table B4: Maximum processing times of the mortar and minimum curing times**

Concrete temperature <sup>3)</sup> [ °C ]	Minimum curing time <sup>1)</sup> $t_{cure}$ [ Minutes ]	Maximum processing time <sup>2)</sup> $t_{work}$ [ Minutes ]
	FIS HB / FIS PM	FIS HB / FIS PM
-5 to ±0	360	--
>±0 to +5	180	--
>+5 to +10	90	15
>+10 to +20	35	6
>+20 to +30	20	4
>+30 to +40	12	2

- <sup>1)</sup> In wet concrete or flooded holes the curing times must be doubled.
- <sup>2)</sup> The working temperature of the mortar must be at least +5°C
- <sup>3)</sup> The base temperature during the curing time must not fall below -5°C.






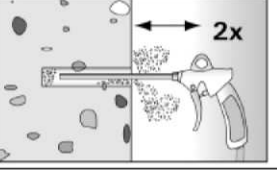
**Injection system fischer Powerbond**

**Intended Use**  
 Cleaning tools  
 Processing times and curing times






**Annex B 3**

**Installation instructions part1**

**Drilling and cleaning the hole (hammer drill)**

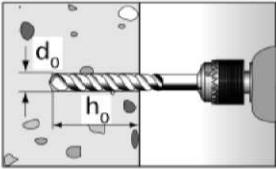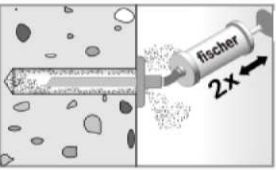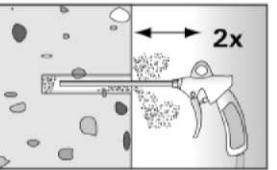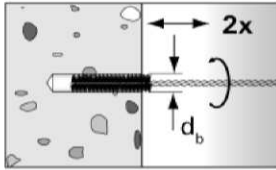1		<p>Drill the hole. Drill hole diameter <math>d_0</math> and drill hole depth <math>h_0</math> see Table <b>B2</b></p>	
2		<p>Size M10, M12, M16 Blow out the drill hole two times with manual pump</p>	 <p>All sizes Blow out the drill hole two times, using oil-free compressed air (<math>p &gt; 6</math> bar).</p>
3		<p>Brush the drill hole two times with corresponding steel brush, beginning from the bottom of the hole. If needed with extension. The brush must produce natural resistance while entering the bore hole. If not, the brush is too small and must be replaced with a proper brush. Diameters of brushes <math>d_b</math> see Table <b>B3</b>.</p>	
4		<p>Size M10, M12, M16 Blow out the drill hole two times with manual pump</p>	 <p>All sizes Blow out the drill hole two times, using oil-free compressed air (<math>p &gt; 6</math> bar).</p>

**Drilling and cleaning the hole (drilling with diamond drill bit)**

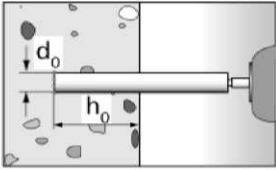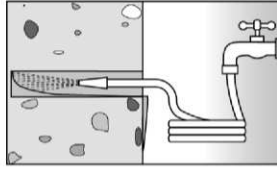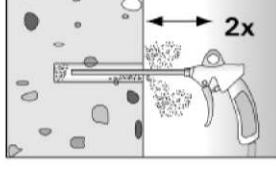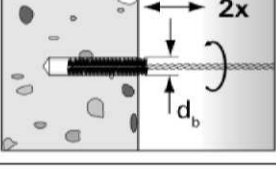
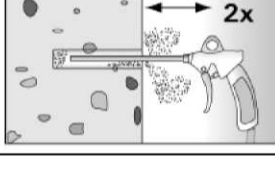


1		<p>Drill the hole. Drill hole diameter <math>d_0</math> and drill hole depth <math>h_0</math> see Table <b>B2</b></p>	 <p>Break the drill core and draw it out. Flush the drill hole until the water comes clear.</p>
2		<p>Blow out the drill hole two times, using oil-free compressed air (<math>p &gt; 6</math> bar).</p>	
3		<p>Brush the drill hole two times with corresponding steel brush, beginning from the bottom of the hole. If needed with extension. The brush must produce natural resistance while entering the bore hole. If not, the brush is too small and must be replaced with a proper brush. Diameters of brushes <math>d_b</math> see Table <b>B3</b>.</p>	
4		<p>Blow out the drill hole two times, using oil-free compressed air (<math>p &gt; 6</math> bar).</p>	

**Injection system fischer Powerbond**









**Intended use**  
Installation instructions part 1

**Annex B 4**

**Installation instructions part 2;  
Preparing the cartridge**

5		<p>Twist off the sealing cap</p>		<p>Twist on the static mixer (the spiral in the static mixer must be clearly visible).</p>
6		<p>Place the cartridge into the dispenser.</p>	 <p>Press approximately 10 cm of material out until the resin is evenly grey in colour. Don't use mortar that is not uniformly grey.</p>	

**Installation Power Sleeve and anchor rod**

7	 <p>Insert the Power Sleeve into the clean drill hole. For push through anchorage use a suitable tool with marking for setting depth.</p>	 <p>The Power Sleeve must be flush with the surface of the concrete.</p>
8	 <p>Fill approx. 2/3 of the hole through the Power Sleeve with injection mortar FIS HB or FIS PM beginning from the back of the hole, slowly withdrawing the mixer with each trigger pull. If necessary use an extension.</p>	
9	 <p><math>h_{ef,min}</math></p>	 <p>Press the anchor rod down to the bottom of the hole, turning it slightly while doing so. <math>h_{ef,min}</math> and <math>h_{ef,max}</math> see Table B2</p>
10	 <p>For correct installation excess mortar must emerge from the drill hole after reaching the setting depth mark. Otherwise remove the anchor rod immediately and re-inject additional amount of FIS PM mortar. For push-through installation the annular gap has to be filled with mortar.</p>	 <p>Wait for the specified curing time <math>t_{cure}</math> see Table B4</p>
11	 <p>Mounting the fixture <math>T_{inst,max}</math> see Table B2</p>	

**Injection system fischer Powerbond**

**Intended use**  
Installation instructions part 2

**Annex B 5**

**Table C1: Characteristic values under tension load**

Size		M10	M12	M16	M20	M24		
<b>Steel failure</b>								
Characteristic resistance $N_{Rk,s}$	Steel zinc plated	Property class	5.8 [kN]	29	43	79	123	177
		class	8.8 [kN]	47	68	126	196	282
	Stainless steel A4	Property class	50 [kN]	29	43	79	123	177
		class	70 [kN]	41	59	110	172	247
	High corrosion resistance steel C	Property class	50 [kN]	29	43	79	123	177
		class	70 <sup>2)</sup> [kN]	41	59	110	172	247
		class	80 [kN]	47	68	126	196	282
Partial safety factor $\gamma_{Ms,N}$ <sup>1)</sup>	Steel zinc plated	Property class	5.8 [-]	1,50				
		class	8.8 [-]	1,50				
	Stainless steel A4	Property class	50 [-]	2,86				
		class	70 [-]	1,87				
	High corrosion resistance steel C	Property class	50 [-]	1,50				
		class	70 <sup>2)</sup> [-]	2,86				
		class	80 [-]	1,60				
<b>Pullout and concrete cone failure in cracked concrete C20/25</b>								
Diameter for calculation	d	[mm]	10	12	16	20	24	
Characteristic resistance	$\tau_{Rk,p}$	[N/mm <sup>2</sup> ]	10	10	10	10	8	
Factor acc. CEN/TS 1992-4:2009 Section 6.2.2.3	$k_{cr}$	[-]	7,2					
<b>Pullout and concrete cone failure in uncracked concrete C20/25</b>								
Characteristic resistance	$\tau_{Rk,p}$	[N/mm <sup>2</sup> ]	13	13	13(12) <sup>3)</sup>	11,5	11	
Factor acc. CEN/TS 1992-4:2009 Section 6.2.2.3	$k_{ucr}$	[-]	10,1					
Increasing factor for $\tau_{Rk,p}$	$\psi_c$	C25/30	[-]	1,06				
		C30/37	[-]	1,12				
		C35/45	[-]	1,19				
		C40/50	[-]	1,23				
		C45/55	[-]	1,27				
		C50/60	[-]	1,30				
Edge distance	$h_{ef} / d \leq 8$	$c_{cr,sp}$	[mm]	$1,75 \cdot h_{ef}$	$1,85 \cdot h_{ef}$	$1,95 \cdot h_{ef}$	$2 \cdot h_{ef}$	$2 \cdot h_{ef}$
	$h_{ef} / d > 8$	$c_{cr,sp}$	[mm]	$1,5 \cdot h_{ef}$				
Spacing		$s_{cr,sp}$	[mm]	$2 \cdot c_{cr,sp}$				
<b>Installation safety factors</b>								
Dry and wet concrete	$\gamma_2 = \gamma_{inst}$		[-]	1,0				
Flooded hole			[-]	1,2				

<sup>1)</sup> In absence of other national regulations

<sup>2)</sup>  $f_{uk} = 700 \text{ N/mm}^2$ ;  $f_{yk} = 560 \text{ N/mm}^2$

<sup>3)</sup>  $h_{ef} > 9d$

**Injection system fischer Powerbond**

**Performances**

Characteristic values under tension load

**Annex C 1**

**Table C2: Characteristic values under shear load**

Size					M10	M12	M16	M20	M24	
<b>Steel failure without lever arm</b>										
Characteristic resistance $V_{Rk,s}$	Steel zinc plated	Property	5.8	[kN]	15	21	39	61	89	
		class	8.8	[kN]	23	34	63	98	141	
	Stainless steel A4	Property	50	[kN]	15	21	39	61	89	
		class	70	[kN]	20	30	55	86	124	
	High corrosion resistance steel C	Property	50	[kN]	15	21	39	61	89	
		class	70 <sup>2)</sup>	[kN]	20	30	55	86	124	
				80	[kN]	23	34	63	98	141
	<b>Steel failure with lever arm</b>									
Characteristic bending moment $M_{Rk,s}^0$	Steel zinc plated	Property	5.8	[Nm]	37	65	167	324	561	
		class	8.8	[Nm]	60	105	266	519	898	
	Stainless steel A4	Property	50	[Nm]	37	65	166	324	561	
		class	70	[Nm]	52	92	233	454	785	
	High corrosion resistance steel C	Property	50	[Nm]	37	65	166	324	561	
		class	70 <sup>2)</sup>	[Nm]	52	92	233	454	785	
				80	[Nm]	60	105	266	519	898
	<b>Partial safety factor steel failure</b>									
$\gamma_{Ms,v}$ <sup>1)</sup>	Steel zinc plated	Property	5.8	[-]			1,25			
		class	8.8	[-]			1,25			
	Stainless steel A4	Property	50	[-]			2,38			
		class	70	[-]			1,56			
	High corrosion resistance steel C	Property	50	[-]			1,25			
		class	70 <sup>2)</sup>	[-]			2,38			
			80	[-]		1,33				
<b>Concrete pryout failure</b>										
Factor k acc. to TR029 Section 5.2.3.3 resp. $k_3$ acc. to CEN/TS 1992-4-5:2009 Section 6.3.3				$k_{(3)}$	[-]		2,0			
<b>Installation safety factors</b>										
All installation conditions				$\gamma_2 = \gamma_{inst}$	[-]		1,0			

<sup>1)</sup> In absence of other national regulations

<sup>2)</sup>  $f_{uk} = 700 \text{ N/mm}^2$ ;  $f_{yk} = 560 \text{ N/mm}^2$

**Injection system fischer Powerbond**

**Performances**

Characteristic values under shear load

**Annex C 2**



**Table C3.1: Displacements under tension load in uncracked concrete**

Displacement-Factors for tension <sup>1)</sup>						
Size		M10	M12	M16	M20	M24
$\delta_{N0}$ -Factor	[mm/(N/mm <sup>2</sup> )]	0,03	0,04	0,05	0,07	0,09
$\delta_{N\infty}$ -Factor	[mm/(N/mm <sup>2</sup> )]	0,05	0,06	0,08	0,10	0,13

**Table C3.2: Displacements under tension load in cracked concrete**

Displacement-Factors for tension <sup>1)</sup>						
Size		M10	M12	M16	M20	M24
$\delta_{N0}$ -Factor	[mm/(N/mm <sup>2</sup> )]	0,07	0,09	0,11	0,14	0,18
$\delta_{N\infty}$ -Factor	[mm/(N/mm <sup>2</sup> )]	0,10	0,13	0,17	0,21	0,27

<sup>1)</sup> Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0}\text{-Factor} \cdot \tau_{Ed}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot \tau_{Ed}$$

( $\tau_{Ed}$  : Design value of the applied tensile stress)

**Table C4: Displacements under shear load**

Displacement-Factors for shear load <sup>1)</sup>						
Size		M10	M12	M16	M20	M24
$\delta_{V0}$ -Factor	[mm/kN]	0,15	0,12	0,09	0,07	0,06
$\delta_{V\infty}$ -Factor	[mm/kN]	0,22	0,18	0,14	0,11	0,09

<sup>1)</sup> Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0}\text{-Factor} \cdot V_{Ed}$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-Factor} \cdot V_{Ed}$$

( $V_{Ed}$  : Design value of the applied shear force)

**Injection system fischer Powerbond**

**Performances**  
Displacements

**Annex C 3**