



DECLARATION OF PERFORMANCE



No. 0100 – EN

1. Unique identification code of the product-type: Injection system fischer Powerbond

2. Intended use/es:

Product	Intended use/es
Bonded anchor for use in concrete	For fixing and/or supporting concrete structural elements or heavy units such as cladding and suspended ceilings, see appendix, especially Annexes B 1 to B 5

3. Manufacturer: fischerwerke GmbH & Co. KG, Otto-Hahn-Straße 15, 79211 Denzlingen, Germany

4. Authorised representative: --

5. System/s of AVCP: 1

6a. Harmonised standard: ---

Notified body/ies: ---

6b. European Assessment Document: ETAG 001; 2013-04

European Technical Assessment: ETA-12/0160; 2016-04-21

Technical Assessment Body: DIBt

Notified body/ies: 1343 – MPA Darmstadt

7. Declared performance/s:

Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic values under static and quasi-static action for design according to TR 029 or CEN/TS 1992-4:2009, Displacements	See appendix, especially Annexes C 1 to C 3

Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A 1
Resistance to fire	NPD

8. Appropriate Technical Documentation and/or Specific Technical Documentation: ---

The performance of the product identified above is in conformity with the set of declared performance/s. This declaration of performance is issued, in accordance with Regulation (EU) No 305/2011, under the sole responsibility of the manufacturer identified above.

Signed for and on behalf of the manufacturer by:

Andreas Bucher, Dipl.-Ing.

Wolfgang Hengesbach, Dipl.-Ing., Dipl.-Wirtsch.-Ing.

i.V. A. Bucher

i.V. W. Hengesbach

Tumlingen, 2016-04-28

- This DoP has been prepared in different languages. In case there is a dispute on the interpretation the english version shall always prevail.

- The Appendix includes voluntary and complementary information in English language exceeding the (language-neutrally specified) legal requirements.

Specific Part

1 Technical description of the product

The injection system fischer Powerbond is a bonded anchor consisting of a cartridge with injection mortar fischer FIS PM or FIS HB, an anchor rod and the corresponding fischer Power Sleeve FIS PS.

The steel element is placed into a drilled hole filled with injection mortar and is anchored via the bond between metal part, injection mortar and concrete.

The product description is given in Annex A.

2 Specification of the intended use in accordance with the applicable European Assessment Document

The performances given in Section 3 are only valid if the anchor is used in compliance with the specifications and conditions given in Annex B.

The verifications and assessment methods on which this European Technical Assessment is based lead to the assumption of a working life of the anchor of at least 50 years. The indications given on the working life cannot be interpreted as a guarantee given by the producer, but are to be regarded only as a means for choosing the right products in relation to the expected economically reasonable working life of the works.

3 Performance of the product and references to the methods used for its assessment

3.1 Mechanical resistance and stability (BWR 1)

Essential characteristic	Performance
Characteristic values under static and quasi-static action for design according to TR 029 or CEN/TS 1992-4:2009, Displacements	See Annex C 1 to C 3

3.2 Safety in case of fire (BWR 2)

Essential characteristic	Performance
Reaction to fire	Anchorage satisfy requirements for Class A1
Resistance to fire	No performance assessed

3.3 Hygiene, health and the environment (BWR 3)

Regarding dangerous substances there may be requirements (e.g. transposed European legislation and national laws, regulations and administrative provisions) applicable to the products falling within the scope of this European Technical Assessment. In order to meet the provisions of Regulation (EU) No 305/2011, these requirements need also to be complied with, when and where they apply.

3.4 Safety in use (BWR 4)

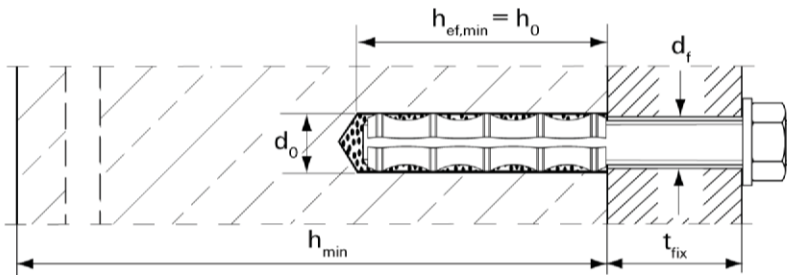
The essential characteristics regarding Safety in use are included under the Basic Works Requirement Mechanical resistance and stability.

4 Assessment and verification of constancy of performance (AVCP) system applied, with reference to its legal base


In accordance with guideline for European technical approval ETAG 001, April 2013 used as European Assessment Document (EAD) according to Article 66 Paragraph 3 of Regulation (EU) No 305/2011 the applicable European legal act is: [96/582/EC].

The system to be applied is: 1


Installation conditions



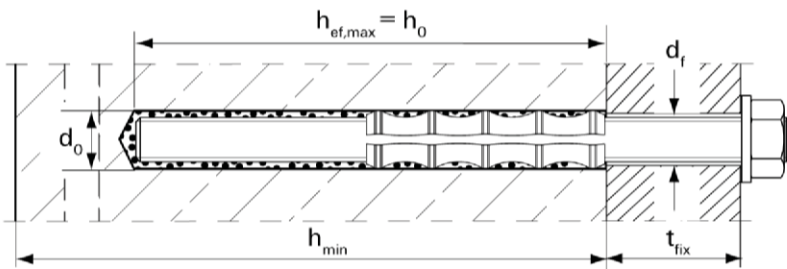$h_{ef,min} = \text{sleeve length } L_H$
(see Table B2)



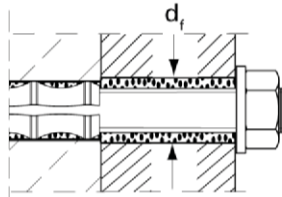$h_{ef,max} = 2 \cdot \text{sleeve length } L_H$
(see Table B2)




Push-through anchorage
(annular gap filled with mortar)

Injection system fischer Powerbond

Product description
Installation conditions

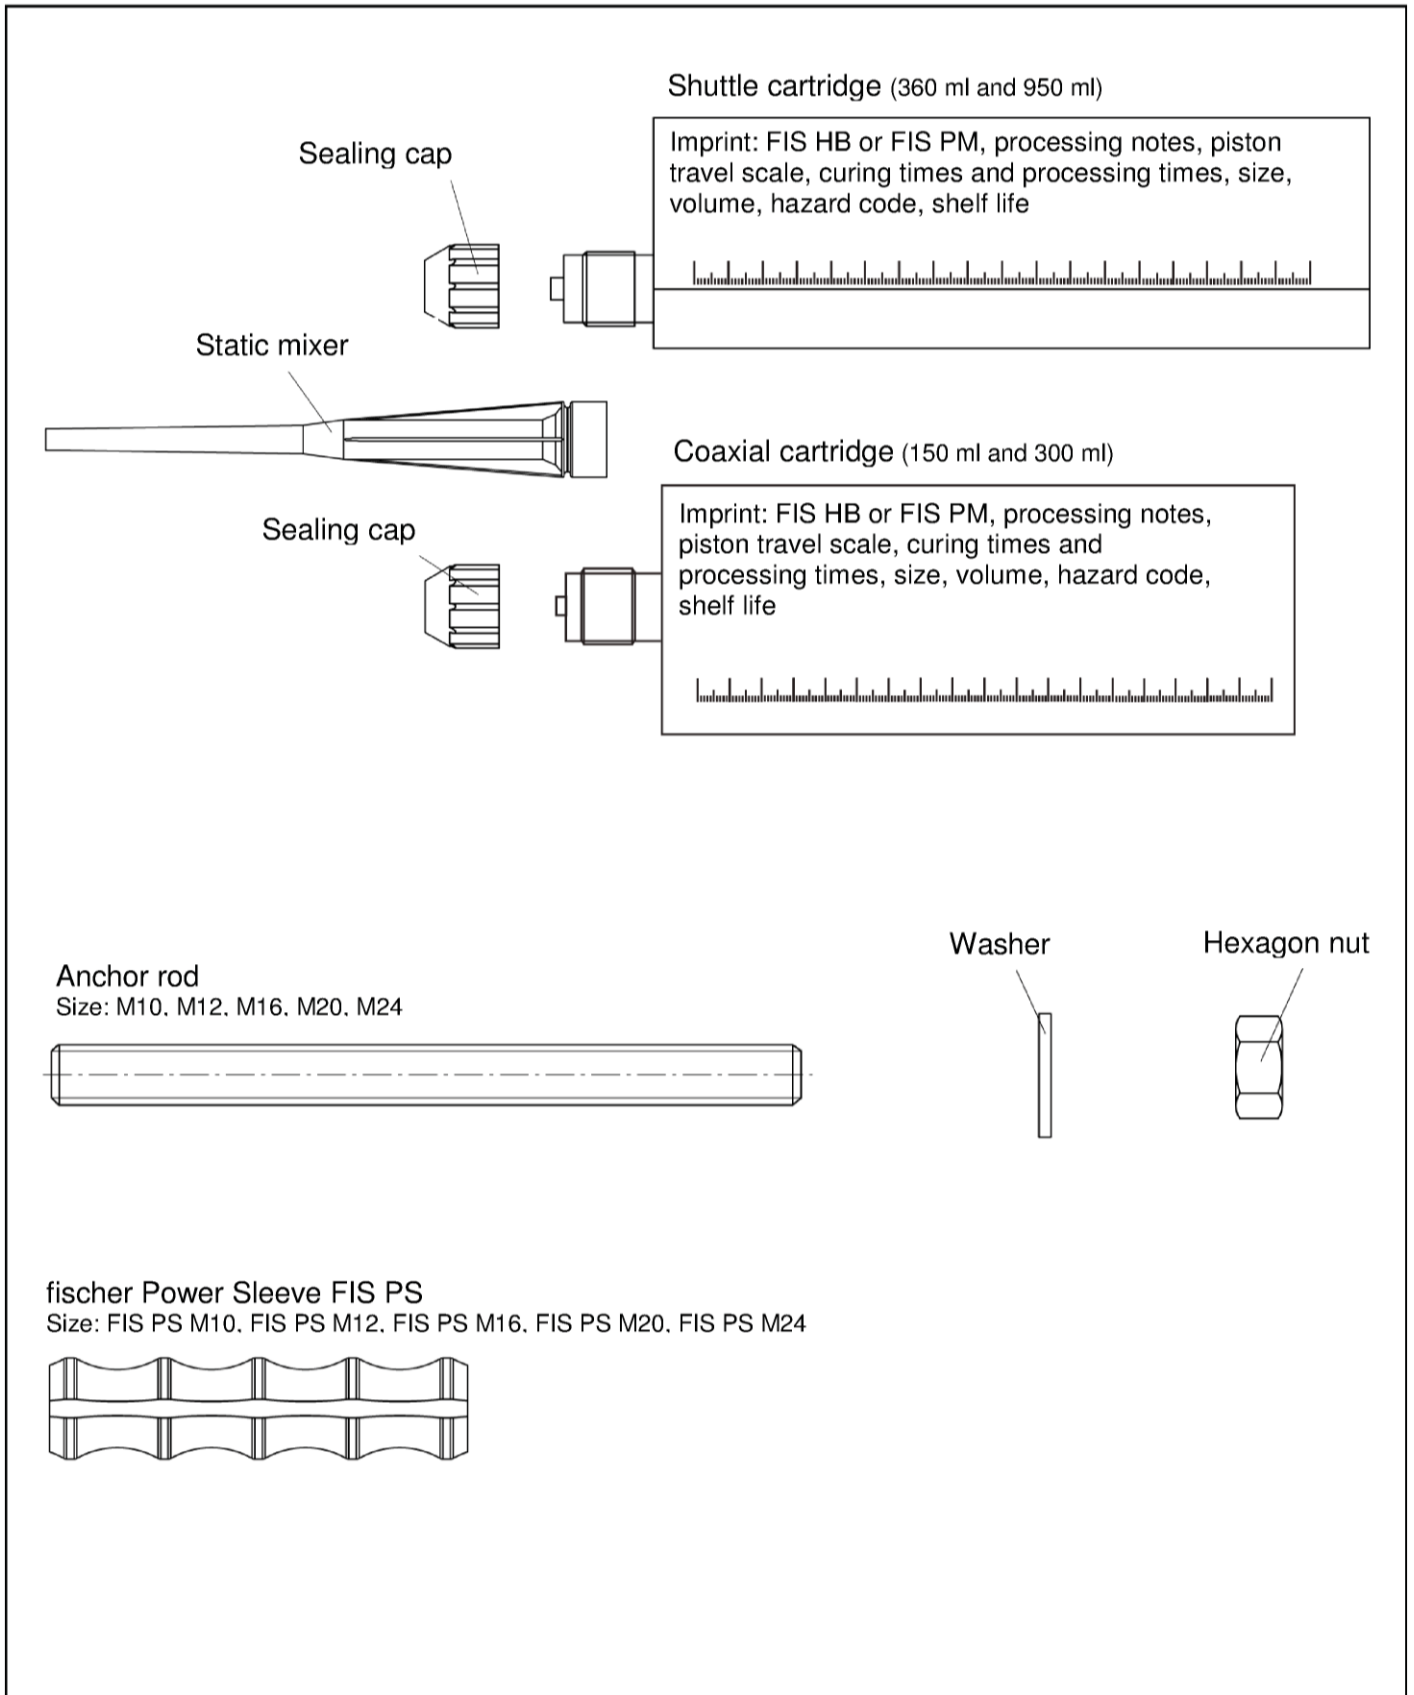Annex A 1



<p>Injection system fischer Powerbond</p>	<p>Annex A 2</p>
<p>Product description Cartridge, static mixer, steel parts</p>	



Table A1: Materials

Part	Description	Material		
1	Mortar cartridge	Mortar, hardener, fillers		
		Steel, zinc plated	Stainless steel A4	High corrosion-resistant steel C
2	Anchor rod	Property class 5.8 or 8.8; EN ISO 898-1: 2013 zinc plated $\geq 5\mu\text{m}$, EN ISO 4042:1999 A2K or hot-dip galvanised EN ISO 10684:2004 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ fracture elongation	Property class 50, 70 or 80 EN ISO 3506-1:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4062, 1.4662; 1.4462 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ fracture elongation	Property class 50 or 80 EN ISO 3506:2009 or property class 70 with $f_{yk} = 560 \text{ N/mm}^2$ 1.4565; 1.4529 EN 10088-1:2014 $f_{uk} \leq 1000 \text{ N/mm}^2$ $A_5 > 8\%$ fracture elongation
3	Washer ISO 7089:2000	zinc plated $\geq 5\mu\text{m}$, EN ISO 4042:1999 A2K or hot-dip galvanised EN ISO 10684:2004	1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4666 EN 10088-1:2014	1.4565; 1.4529 EN 10088-1:2014
4	Hexagon nut	Property class 5 or 8; EN ISO 898-2:2013 zinc plated $\geq 5\mu\text{m}$, ISO 4042:1999 A2K or hot-dip galvanised EN ISO 10684:2004	Property class 50, 70 or 80 EN ISO 3506:2009 1.4401; 1.4404; 1.4578; 1.4571; 1.4439; 1.4362; 1.4666 EN 10088-1:2014	Property class 50, 70 or 80 EN ISO 3506:2009 1.4565; 1.4529 EN 10088-1:2014
5	Power Sleeve	Stainless steel A2 or A4		1.4565; 1.4529

Injection system fischer PowerbondProduct description
Materials**Annex A 3**

Specifications of intended use:

Table B1: Overview use categories and performance categories

Anchorages subject to		FIS HB or FIS PM with ...	
		Anchor rod	with Power Sleeve
			
Hammer drilling		all sizes	
Diamond drilling		Size M10, M12, M16	
Static and quasi static load, in	uncracked concrete	all sizes	Tables B2, C1; C2; C3; C4
	cracked concrete	all sizes	
Use category	Dry or wet concrete	all sizes	
	Flooded hole	all sizes	
Installation temperature		-5°C bis +40°C	
Service temperature	-40°C to +80°C	(max. long term temperature +50°C and max. short term temperature +80°C)	

Base materials:

- Reinforced or unreinforced normal weight concrete according to EN 206:2013
- Strength classes C20/25 to C50/60 according to EN 206:2013

Use conditions (Environmental conditions):

- Structures subject to dry internal conditions (zinc coated steel, stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure (including industrial and marine environment) and to permanently damp internal condition, if no particular aggressive conditions exist (stainless steel or high corrosion resistant steel)
- Structures subject to external atmospheric exposure and to permanently damp internal condition, if other particular aggressive conditions exist (high corrosion resistant steel)

Note: Particular aggressive conditions are e.g. permanent, alternating immersion in seawater or the splash zone of seawater, chloride atmosphere of indoor swimming pools or atmosphere with extreme chemical pollution (e.g. in desulphurization plants or road tunnels where de-icing materials are used)

Design:

- Anchorages have to be designed under the responsibility of an engineer experienced in anchorages and concrete work
- Verifiable calculation notes and drawings are prepared taking account of the loads to be anchored. The position of the anchor is indicated on the design drawings (e. g. position of the anchor relative to reinforcement or to supports, etc.)
- Anchorages under static or quasi-static actions are designed in accordance with EOTA Technical Report TR 029 "Design of bonded anchors" Edition September 2010 or CEN/TS 1992-4:2009

Installation:

- Anchor installation carried out by appropriately qualified personnel and under the supervision of the person responsible for technical matters of the site.
- In case of aborted hole: The hole shall be filled with mortar
- Marking and keeping the effective anchorage depth
- Overhead installation is allowed

Injection system fischer Powerbond	Annex B 1
Intended Use Specifications	


Table B2: Installation parameters

Size (anchor rod)		M10	M12	M16	M20	M24	
Width across flat	SW [mm]	17	19	24	30	36	
Nominal drill bit diameter	d ₀ [mm]	14	16	20	25	28	
Depth of drill hole	h ₀ [mm]	h ₀ = h _{ef}					
Corresponding Power Sleeve	FIS [-]	PS M10	PS M12	PS M16	PS M20	PS M24	
Length of sleeve	L _H [mm]	60	72	96	120	144	
Diameter of sleeve	d _H [mm]	14	16	20	25	28	
Effective anchorage depth ¹⁾	h _{ef,min} [mm]	60	72	96	120	144	
6 • d to 12 • d	h _{ef,max} [mm]	120	144	192	240	288	
Minimum edge distance and minimum spacing for h_{ef,min} ≤ h_{ef} ≤ h_{ef,max}							
Cracked concrete	s _{min} = c _{min} [mm]	50	55	60	80	100	
Uncracked concrete	s _{min} = c _{min} [mm]	55	55	65	80	100	
Diameter of clearance hole in the fixture ²⁾	Pre positioned anchorage	d _f [mm]	12	14	18	22	26
	Push through anchorage	d _f [mm]	15	17	21	26	30
Minimum thickness of concrete member	h _{min} [mm]	h _{ef} + 30 (≥ 100)	h _{ef} + 2d ₀				
Max. torque moment	T _{inst,max} [Nm]	20	40	60	100	120	

¹⁾ h_{ef,min} ≤ h_{ef} ≤ h_{ef,max} is possible

²⁾ For larger clearance holes in the fixture see TR 029, 4.2.2.1 or CEN/TS 1992-4-1:2009, 5.2.3.1

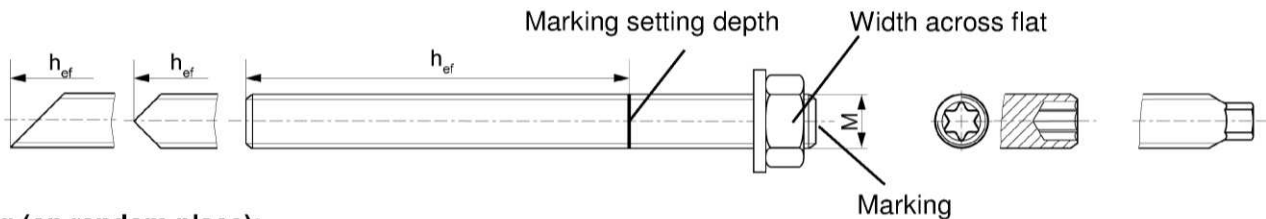fischer anchor rods




Marking (on random place):

Property class 8.8, stainless steel, property class 80 or high corrosion-resistant steel, property class 80: •
 Stainless steel A4, property class 50 and high corrosion-resistant steel, property class 50: ••

Commercial standard threaded rods, washers and hexagon nuts may also be used if the following requirements are fulfilled:

- Materials, dimensions and mechanical properties according Annex A 3, Table A1
- Inspection certificate 3.1 according to EN 10204:2004, the documents have to be stored
- Marking of embedment depth

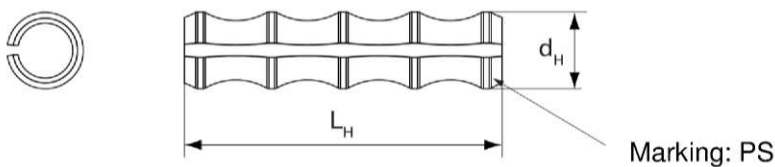fischer Power Sleeve



Injection system fischer Powerbond

Intended Use
 Installation parameters

Annex B 2

TableB3: Parameters of steel brush FIS BS Ø

Drill bit diameters	[mm]	14	16	20	25	28
Steel brush diameters d_b	[mm]	16	20	25	27	30

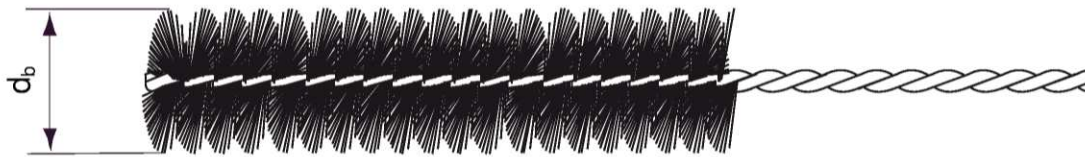


Table B4: Maximum processing times of the mortar and minimum curing times

Concrete temperature ³⁾ [°C]	Minimum curing time ¹⁾ t_{cure} [Minutes]	Maximum processing time ²⁾ t_{work} [Minutes]
	FIS HB / FIS PM	FIS HB / FIS PM
-5 to ±0	360	--
>±0 to +5	180	--
>+5 to +10	90	15
>+10 to +20	35	6
>+20 to +30	20	4
>+30 to +40	12	2

- 1) In wet concrete or flooded holes the curing times must be doubled.
- 2) The working temperature of the mortar must be at least +5°C
- 3) The base temperature during the curing time must not fall below -5°C.

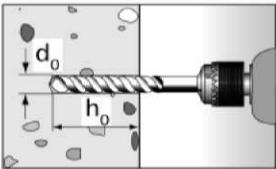
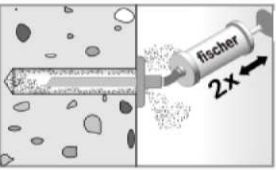
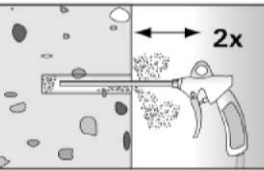
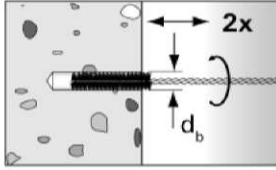
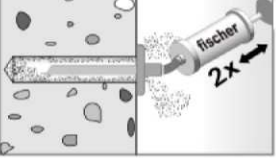
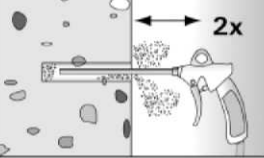
Injection system fischer Powerbond

Intended Use
Cleaning tools
Processing times and curing times






Annex B 3

Installation instructions part1

Drilling and cleaning the hole (hammer drill)

1		<p>Drill the hole. Drill hole diameter d_0 and drill hole depth h_0 see Table B2</p>	
2		<p>Size M10, M12, M16 Blow out the drill hole two times with manual pump</p>	 <p>All sizes Blow out the drill hole two times, using oil-free compressed air ($p > 6$ bar).</p>
3		<p>Brush the drill hole two times with corresponding steel brush, beginning from the bottom of the hole. If needed with extension. The brush must produce natural resistance while entering the bore hole. If not, the brush is too small and must be replaced with a proper brush. Diameters of brushes d_b see Table B3.</p>	
4		<p>Size M10, M12, M16 Blow out the drill hole two times with manual pump</p>	 <p>All sizes Blow out the drill hole two times, using oil-free compressed air ($p > 6$ bar).</p>

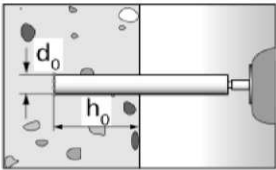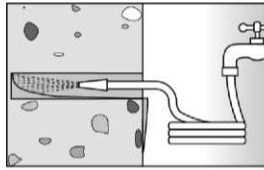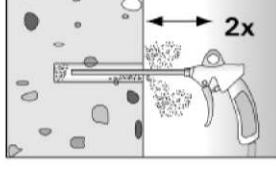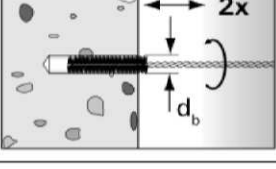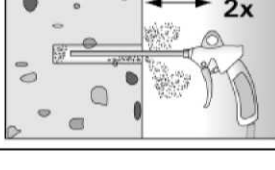Drilling and cleaning the hole (drilling with diamond drill bit)





1		<p>Drill the hole. Drill hole diameter d_0 and drill hole depth h_0 see Table B2</p>	 <p>Break the drill core and draw it out. Flush the drill hole until the water comes clear.</p>
2		<p>Blow out the drill hole two times, using oil-free compressed air ($p > 6$ bar).</p>	
3		<p>Brush the drill hole two times with corresponding steel brush, beginning from the bottom of the hole. If needed with extension. The brush must produce natural resistance while entering the bore hole. If not, the brush is too small and must be replaced with a proper brush. Diameters of brushes d_b see Table B3.</p>	
4		<p>Blow out the drill hole two times, using oil-free compressed air ($p > 6$ bar).</p>	

Injection system fischer Powerbond








Intended use
Installation instructions part 1

Annex B 4

**Installation instructions part 2;
Preparing the cartridge**

5		<p>Twist off the sealing cap</p>		<p>Twist on the static mixer (the spiral in the static mixer must be clearly visible).</p>
6		<p>Place the cartridge into the dispenser.</p>	 <p>Press approximately 10 cm of material out until the resin is evenly grey in colour. Don't use mortar that is not uniformly grey.</p>	

Installation Power Sleeve and anchor rod

7	 <p>Insert the Power Sleeve into the clean drill hole. For push through anchorage use a suitable tool with marking for setting depth.</p>	 <p>The Power Sleeve must be flush with the surface of the concrete.</p>
8	 <p>Fill approx. 2/3 of the hole through the Power Sleeve with injection mortar FIS HB or FIS PM beginning from the back of the hole, slowly withdrawing the mixer with each trigger pull. If necessary use an extension.</p>	
9	 <p>Press the anchor rod down to the bottom of the hole, turning it slightly while doing so. $h_{ef,min}$ and $h_{ef,max}$ see Table B2</p>	
10	 <p>For correct installation excess mortar must emerge from the drill hole after reaching the setting depth mark. Otherwise remove the anchor rod immediately and re-inject additional amount of FIS PM mortar. For push-through installation the annular gap has to be filled with mortar.</p>	 <p>Wait for the specified curing time t_{cure} see Table B4</p>
11	 <p>Mounting the fixture $T_{inst,max}$ see Table B2</p>	

Injection system fischer Powerbond

Intended use
Installation instructions part 2

Annex B 5

Table C1: Characteristic values under tension load

Size				M10	M12	M16	M20	M24
Steel failure								
Characteristic resistance $N_{Rk,s}$	Steel zinc plated	Property	5.8 [kN]	29	43	79	123	177
		class	8.8 [kN]	47	68	126	196	282
	Stainless steel A4	Property	50 [kN]	29	43	79	123	177
		class	70 [kN]	41	59	110	172	247
	High corrosion resistance steel C	Property	50 [kN]	29	43	79	123	177
		class	70 ²⁾ [kN]	41	59	110	172	247
Partial safety factor $\gamma_{Ms,N}$ ¹⁾	Steel zinc plated	Property	5.8 [-]	1,50				
		class	8.8 [-]	1,50				
	Stainless steel A4	Property	50 [-]	2,86				
		class	70 [-]	1,87				
	High corrosion resistant steel C	Property	50 [-]	1,50				
		class	70 ²⁾ [-]	1,50				
Pullout and concrete cone failure in cracked concrete C20/25								
Diameter for calculation	d	[mm]		10	12	16	20	24
Characteristic resistance	$\tau_{Rk,p}$	[N/mm ²]		10	10	10	10	8
Factor acc. CEN/TS 1992-4:2009 Section 6.2.2.3	k_{cr}	[-]		7,2				
Pullout and concrete cone failure in uncracked concrete C20/25								
Characteristic resistance	$\tau_{Rk,p}$	[N/mm ²]		13	13	13(12) ³⁾	11,5	11
Factor acc. CEN/TS 1992-4:2009 Section 6.2.2.3	k_{ucr}	[-]		10,1				
Increasing factor for $\tau_{Rk,p}$	ψ_c	C25/30	[-]	1,06				
		C30/37	[-]	1,12				
		C35/45	[-]	1,19				
		C40/50	[-]	1,23				
		C45/55	[-]	1,27				
		C50/60	[-]	1,30				
Edge distance	$h_{ef} / d \leq 8$	$c_{cr,sp}$	[mm]	$1,75 \cdot h_{ef}$	$1,85 \cdot h_{ef}$	$1,95 \cdot h_{ef}$	$2 \cdot h_{ef}$	$2 \cdot h_{ef}$
	$h_{ef} / d > 8$	$c_{cr,sp}$	[mm]	$1,5 \cdot h_{ef}$				
Spacing		$s_{cr,sp}$	[mm]	$2 \cdot c_{cr,sp}$				
Installation safety factors								
Dry and wet concrete	$\gamma_2 = \gamma_{inst}$		[-]	1,0				
Flooded hole			[-]	1,2				

¹⁾ In absence of other national regulations

²⁾ $f_{uk} = 700 \text{ N/mm}^2$; $f_{yk} = 560 \text{ N/mm}^2$

³⁾ $h_{ef} > 9d$

Injection system fischer Powerbond

Performances

Characteristic values under tension load

Annex C 1

Table C2: Characteristic values under shear load

Size					M10	M12	M16	M20	M24	
Steel failure without lever arm										
Characteristic resistance $V_{Rk,s}$	Steel zinc plated	Property	5.8	[kN]	15	21	39	61	89	
		class	8.8	[kN]	23	34	63	98	141	
	Stainless steel A4	Property	50	[kN]	15	21	39	61	89	
		class	70	[kN]	20	30	55	86	124	
	High corrosion resistance steel C	Property	50	[kN]	15	21	39	61	89	
		class	70 ²⁾	[kN]	20	30	55	86	124	
			class	80	[kN]	23	34	63	98	141
	Steel failure with lever arm									
Characteristic bending moment $M_{Rk,s}^0$	Steel zinc plated	Property	5.8	[Nm]	37	65	167	324	561	
		class	8.8	[Nm]	60	105	266	519	898	
	Stainless steel A4	Property	50	[Nm]	37	65	166	324	561	
		class	70	[Nm]	52	92	233	454	785	
	High corrosion resistance steel C	Property	50	[Nm]	37	65	166	324	561	
		class	70 ²⁾	[Nm]	52	92	233	454	785	
			class	80	[Nm]	60	105	266	519	898
	Partial safety factor steel failure									
$\gamma_{Ms,v}$ ¹⁾	Steel zinc plated	Property	5.8	[-]				1,25		
		class	8.8	[-]				1,25		
	Stainless steel A4	Property	50	[-]				2,38		
		class	70	[-]				1,56		
	High corrosion resistance steel C	Property	50	[-]				1,25		
		class	70 ²⁾	[-]				2,38		
		class	80	[-]			1,25			
			80	[-]			1,33			
Concrete pryout failure										
Factor k acc. to TR029										
Section 5.2.3.3 resp. k_3 acc. to CEN/TS 1992-4-5:2009					$k_{(3)}$	[-]		2,0		
Section 6.3.3										
Installation safety factors										
All installation conditions					$\gamma_2 = \gamma_{inst}$	[-]		1,0		

¹⁾ In absence of other national regulations

²⁾ $f_{uk} = 700 \text{ N/mm}^2$; $f_{yk} = 560 \text{ N/mm}^2$

Injection system fischer Powerbond

Performances

Characteristic values under shear load

Annex C 2

Table C3.1: Displacements under tension load in uncracked concrete

Displacement-Factors for tension ¹⁾						
Size		M10	M12	M16	M20	M24
δ_{N0} -Factor	[mm/(N/mm ²)]	0,03	0,04	0,05	0,07	0,09
$\delta_{N\infty}$ -Factor	[mm/(N/mm ²)]	0,05	0,06	0,08	0,10	0,13

Table C3.2: Displacements under tension load in cracked concrete

Displacement-Factors for tension ¹⁾						
Size		M10	M12	M16	M20	M24
δ_{N0} -Factor	[mm/(N/mm ²)]	0,07	0,09	0,11	0,14	0,18
$\delta_{N\infty}$ -Factor	[mm/(N/mm ²)]	0,10	0,13	0,17	0,21	0,27

¹⁾ Calculation of effective displacement:

$$\delta_{N0} = \delta_{N0}\text{-Factor} \cdot \tau_{Ed}$$

$$\delta_{N\infty} = \delta_{N\infty}\text{-Factor} \cdot \tau_{Ed}$$

(τ_{Ed} : Design value of the applied tensile stress)

Table C4: Displacements under shear load

Displacement-Factors for shear load ¹⁾						
Size		M10	M12	M16	M20	M24
δ_{V0} -Factor	[mm/kN]	0,15	0,12	0,09	0,07	0,06
$\delta_{V\infty}$ -Factor	[mm/kN]	0,22	0,18	0,14	0,11	0,09

¹⁾ Calculation of effective displacement:

$$\delta_{V0} = \delta_{V0}\text{-Factor} \cdot V_{Ed}$$

$$\delta_{V\infty} = \delta_{V\infty}\text{-Factor} \cdot V_{Ed}$$

(V_{Ed} : Design value of the applied shear force)

Injection system fischer Powerbond

Performances
Displacements

Annex C 3